




Theorylight

Touch Switch TLS601

Control Distance is up to 15m

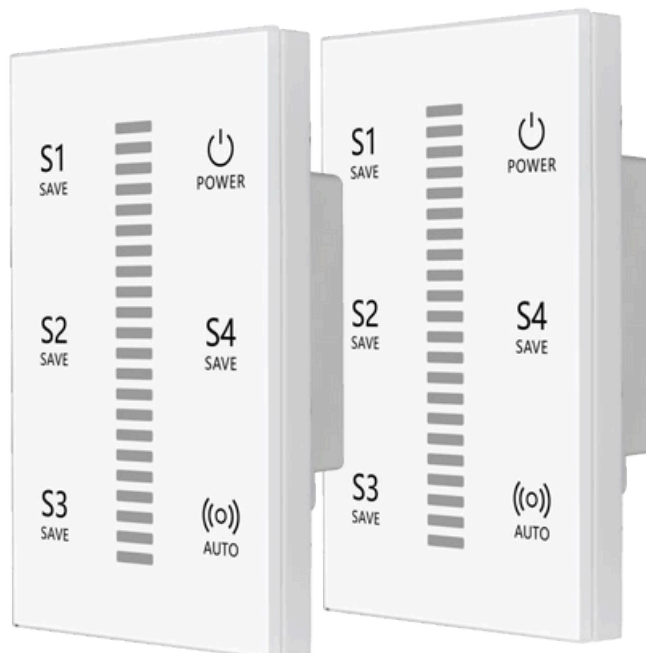

Zigbee Mesh
Network Control



Zoning & Grouping



Theorylight
Remote Control



Dimming Control


CE RoHS

APPLICATIONS


- Shopping Mall
- Office
- Manufacture
- Warehouse
- Exhibition Hall

FEATURES

- Wireless OTA Upgrade .
- Zigbee mesh network smart controls with ZigBee 3.0 Standard protocol.
- Easy Grouping without Gateway via Theorylight Remote Control.
- Dimmable control wirelessly.
- Standby power <0.5W.
- Control distance of 15m.
- Working temperature -20~55 °C.
- Touch screen control mode .
- Mainly applied in indoor lighting control.

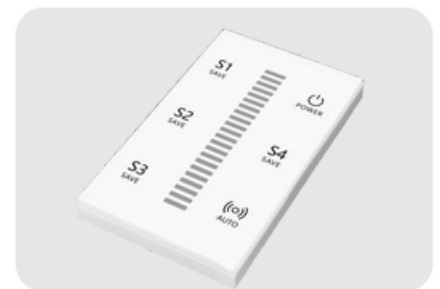

SYSTEM DIAGRAM

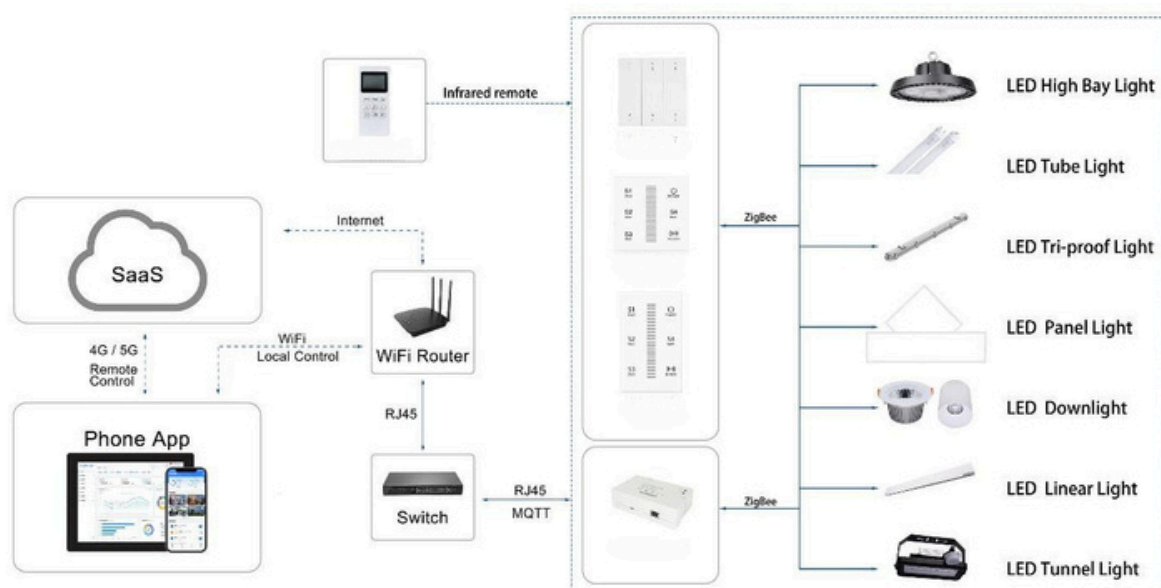


PRODUCT DATA

General Information

Model Name	TLS601-MWZ-SC-1C-OTA-3.0
Protection class IEC	IP20
Warranty	5 Years Warranty
Certificate	CE, RoHS

WIRE CONNECTION

Touch Panel TLS601



Operating and Electrical

Input voltage	100~277 Vac
Input Frequency	50/60Hz
Standby Power	<0.5W
Surge Protection	Line to line 1KV
Isolation Voltage	3750V
Wireless Frequency	2.4G
Remote Control Distance	< 2.5m
Control Distance	15m



Application Conditions

Operating Temperature	-20 °C to +55 °C
-----------------------	------------------

Mechanical and Housing

Structure Material	PC V0
Lens Material	Toughened Glass
Fixture Color	White

Drawing

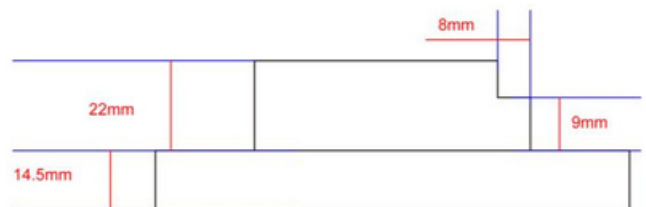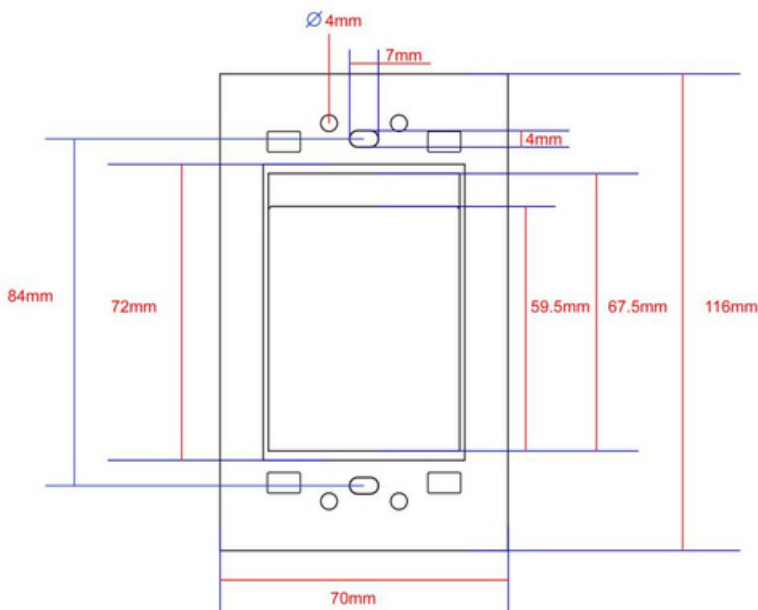

KEY DEFINITION

M odel	TLS601-TLZ-SC-1C-OTA-3.0	
Key Controls	short press	long press 3S
POWER	ON/OFF	-
1	Execute brightness	Save brightness
2	Execute brightness	Save brightness
3	Execute brightness	Save brightness
4	Execute brightness	Save brightness
AUTO	Reactivate sensor	Sound ON/OFF


PRODUCT PARAMETER

Model Number	Standby Power	Control Distance	Input Voltage	W ireless Frequency	Remote Control Distance	Isolation Voltage	Operation Temperature
TLS601-TLZ-SC-1C-OTA-3.0	< 0.5W	15 m	100~277Vac	2.4GHz	< 2.5m	3750V	-20℃ ~ 55 ℃



PACKAGE

Item.	NetWeight	Gross Weight	Product Size	Package Size	Package
TLS601-TLZ-SC-1C-OTA-3.0	182g	226g	116×70×38 mm	140×95×48 mm	1Pcs/Box

TYPICAL WORKING SCENARIOS

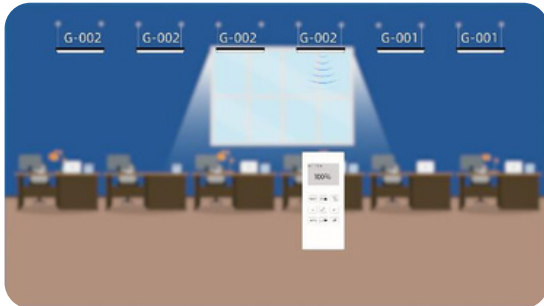

The “Theorylight” smart lamps are embedded with motion sensor and daylight sensor, using a “Theorylight” remote control, users can set grouping and parameters very fast and convenient. By adopting the standard ZigBee technology, “Theorylight” has the inborn advantages like long transmission distance, multiple channels and mesh network.

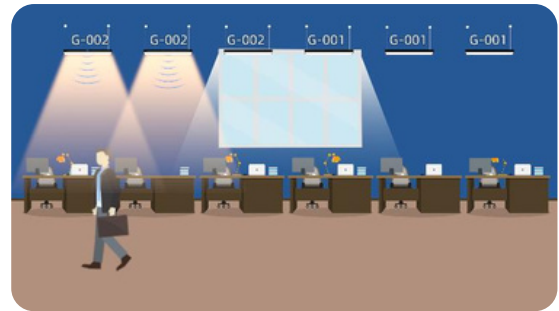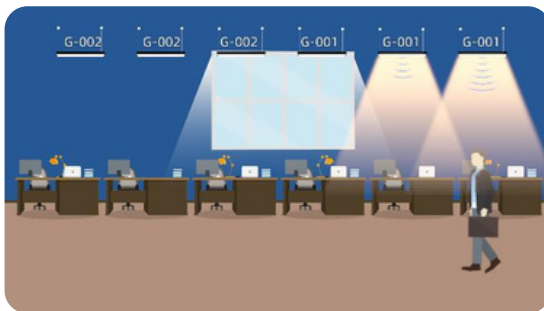

Users can set the sensor parameters of one group or individual lamp with one button, and change lamp brightness. In one group, the motion sensors work together to control these grouped lamps, and the daylight sensors control the individual lampson/off accordingto the ambient brightness.

The Theorylight serial include panel, linear light, tri-proof light, highbay, LED tube. This kind of smart lamps can be used for industrial and commercial area, example offices,warehouses,factories,parking and others.