


Model No.TLIOTQ1

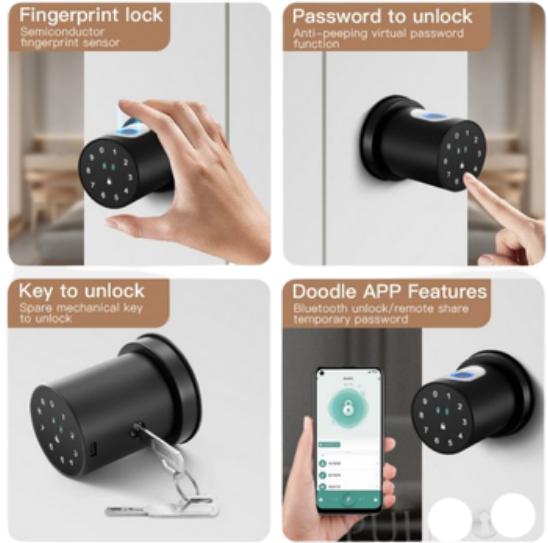

Specifications:

1. Override Computer Key for Emergency use, individual/master cylinder, Self Error detecting by LED and "beep". Improper lock warning
2. Temic 5557 card or Mifare 1K, compatible with Energy Saver
3. ANSI Standard mortise/Euro standard mortise. Inside Dead Bolt. Inside handle retracts latches and deadbolt
4. Power: 6V AA alkaline batteries, 18 months' duration, low Battery Voltage warning. (Lower than 3.5 V)
5. Service Durability: more than 100000 times
6. The Range of Gate Thickness: 38~55mm
7. Humidity: ≤ 95%
8. Working Temperature: -45 degrees centigrade~80 degrees centigrade
9. Effective Time of Opening the Lock: 5 seconds
10. Life Time: 10 years
11. Suitable door: Wooden door, fire-proof door, metal door and so on
12. Inductive Distance: ≥ 20mm
13. Static Load < 10Ua, Working Load: 100Ma-150Ma
14. Step by step installation software, easy operation. OEM locking system available. Classified Access Authorization for safety management.